

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
31 May 2001 (31.05.2001)

PCT

(10) International Publication Number
WO 01/39272 A1

(51) International Patent Classification⁷: **H01L 27/15**

(21) International Application Number: **PCT/EP00/11644**

(22) International Filing Date:
23 November 2000 (23.11.2000)

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:
99204018.8 29 November 1999 (29.11.1999) EP
00203209.2 15 September 2000 (15.09.2000) EP

(71) Applicant (for all designated States except US): **KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL];**
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **DUINEVELD, Paulus, C. [NL/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL); LAMMERS, Jeroen, H. [NL/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL); LIEDENBAUM, Coen, T., H., F. [NL/NL]; Prof. Holstlaan 6,**

NL-5656 AA Eindhoven (NL); DE KONING, Jochem, P., M. [NL/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL); ROELANDSE, Cornelis, D. [NL/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL); VAN DEURZEN, Maria, H., W., A. [NL/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(74) Agent: **BAELE, Ingrid, A., F., M.; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).**

(81) Designated States (national): **CN, JP, KR, US.**


(84) Designated States (regional): **European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).**

Published:

- With international search report.
- Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **ORGANIC ELECTROLUMINESCENT DEVICE AND A METHOD OF MANUFACTURING THEREOF**

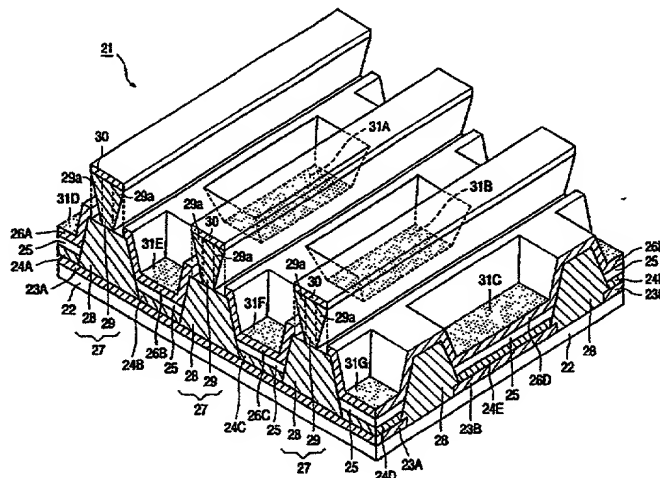

(57) Abstract: An organic electroluminescent device (41) has a plurality of independently addressable electroluminescent elements (51A, B, C, D, E, F) and comprises a patterned first electrode layer comprising a plurality of first electrodes (43A, B, C) and a second electrode layer (26A, B, C, D); an organic, optionally patterned, electroluminescent layer (25) disposed between said first and said second electrode layer; an organic charge transport layer having charge transport areas (24A, B, C, D, E, F) disposed between the first electrode layer and the organic electroluminescent layer (25); and a relief pattern (27) extending between and along neighboring first electrodes. The relief pattern separates said charge transport areas along neighboring first electrodes which has the effect of disconnecting any current path between neighboring first electrodes via the charge transport layer. Thus, the EL device has a small leakage current and can be easily manufactured.

WO 01/39272 A1